




RHEEM HDi-310 HEAVY DUTY HEAT PUMP



| | | | | |
|---|---------------------------------------|--------------|--------------|--|
|  | 300% EFFICIENT ² | 3 - 6 | 310 L | 5 YEAR |
| SOLAR | RATING | PEOPLE | CAPACITY | CYLINDER (supply only) WARRANTY ³ |

FEATURES

- **Top Down Heating** – delivers heated water into the top of the tank for faster hot water delivery
- **No Solar Panels** – No structural load on your roof and looks better too
- **Energy Efficient** – Cuts energy use and greenhouse gas emissions by up to 61%^{1,2}
- **Back-Up Element** – Provides hot water regardless of the weather
- Fits on a compact footprint
- Award winning design
- Eligible for STCs⁴
- 5 Year cylinder warranty³

WHY CHOOSE RHEEM HEAT PUMP?

- Works day and night, as they don't rely on sunlight to operate
- Similar efficiency to traditional electric boosted solar systems
- Frost protected
- Includes a back-up element as standard, delivering 60°C hot water, even on the coldest winter nights

TOP DOWN HEATING TECHNOLOGY

The HDi-310 Heat Pump introduces Top Down Heating, an advanced design which delivers a concentrated volume of hot water available for immediate use. This eliminates the waiting time for the entire tank to reheat that you experience with other water heaters.



COMES ON STEADY, HOT AND STRONG

INSTALL A






RHEEM HDi-310 HEAVY DUTY HEAT PUMP

HOW IT WORKS

The 310L Rheem Heat Pump utilises environmental heating technology to efficiently heat water using the air's warmth. Its advanced 'top-down' heating design delivers a concentrated volume of hot water available for immediate use. By using refrigerant-based technology, heat pumps can operate in any season, day and night. And given that heat pumps rely on extracting heat from the air, Rheem's Heat Pump even comes with an electric 'back-up boosting' element to ensure that hot water is available 24/7, regardless of the weather and air temperature.

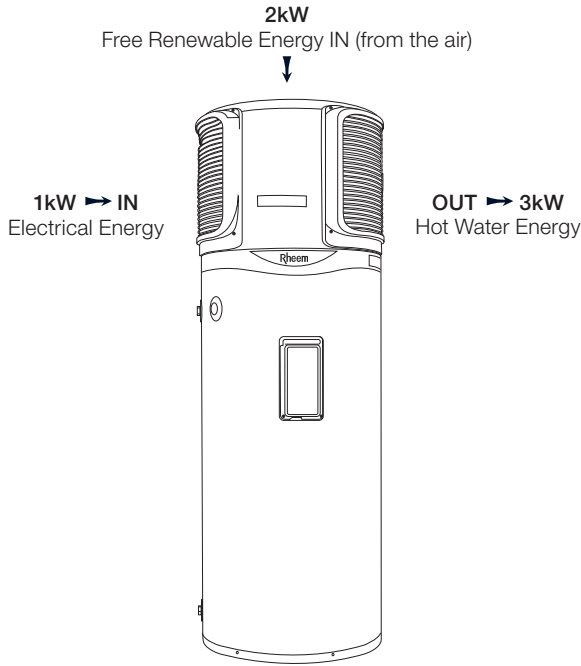


STCs

Small-scale Technology Certificates (STCs) provide a financial benefit to encourage the installation of solar and heat pump water heaters under a Federal Government legislated scheme.

This map shows the climate Zones within Australia which will define the number of STCs allocated to an approved solar and heat pump water heater. Your installation may be eligible¹.


To claim your STC entitlement, simply complete the STC Assignment form. Visit www.rheem.com.au/rebates to download the STC Assignment form.



- ¹ Energy and greenhouse gas emissions reduction of up to 61% based on Australian Government Approved TRNSYS simulation modelling and apply when replacing an electric water heater with a Rheem 551310 Heat Pump water heater in zone 3.
 - ² The impact on an electricity account will depend on the tariff arrangement of the water heater being replaced and where you live. The HDi 310 Rheem Heat Pump water heater is recommended for connection to either 24 hour continuous tariff or extended off peak (min 16 hours/day). Before purchase consult your energy provider for more information on cost comparisons.
 - ³ Warranty Periods. 5 years supply on cylinder, 3 years labour on cylinder, 2 years on sealed system including labour, 1 year supply and labour on all other parts. Applies to single family domestic dwelling only. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty.
 - ⁴ Eligibility criteria apply
- Materials and specifications are subject to change without notice.
- [®] Registered Trademark of Rheem Australia Pty Ltd.
- [™] Trademark of SAI Global.

MODEL HDi-310

| | | |
|---|--------|------|
| Product Code | 551310 | |
| Suitable for No. of People (moderate climate) | 3 - 6 | |
| Dimensions | | |
| Height (A) | mm | 1870 |
| Width (B) | mm | 670 |
| Depth (C) | mm | 679 |
| Weight | | |
| Module | kg | 48 |
| Tank | kg | 87 |
| Technical | | |
| Capacity | L | 310 |
| Power Input | Watts | 1300 |
| Refrigerant | R134a | |
| Element Sizes | kW | 3.6 |
| Boost Capacity | L | 220 |
| Water Connections & Settings | | |
| Inlet | RP ¾ | |
| Outlet | RP ¾ | |
| Tank Relief Valve Setting | kPa | 1000 |
| ECV Setting | kPa | 850 |
| Maximum Mains Pressure Settings | | |
| With ECV | kPa | 680 |
| Without ECV | kPa | 800 |
| Min. Water Supply Pressure | kPa | 200 |

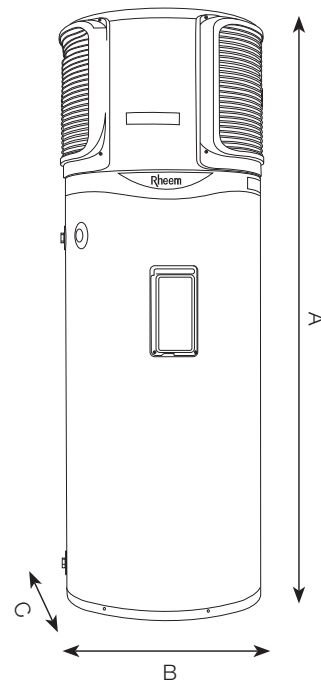

Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 7508, Silverwater, New South Wales 2128, Australia.

Rheem HDi310 Heat Pump spec sheet 07/2016

