

# RHEEM 4 STAR GAS STORAGE WATER HEATER







90, 135 & 170L




4 STAR **PEOPLE** 

CYLINDER WARRANTY **CAPACITY** 



### **FEATURES**

- 4 Star energy efficiency uses less gas than 3 Star water heaters, to save on energy costs
- Mains pressure at multiple taps to service multiple hot water demands at once
- Easy replacement common fittings with standard 3 Star models allow fast, low cost replacement
- 10 Year Cylinder Warranty<sup>1</sup>
- 90L, 135L & 170L capacities



### **High - Temp Thermostat**

Rheem 4 Star's Hi-Temp thermostat keeps water at a temperature of 73°C (higher than the 3 star hot water system you may be replacing), meaning you need less hot water for the same hot shower you're used to enjoying<sup>3</sup>.

# WHY CHOOSE RHEEM GAS STORAGE HOT WATER?

- Range includes 4 & 5 Star energy rated models<sup>2</sup> options that save you money and lower your carbon footprint when replacing a 3 Star gas storage water heater
- Designed for Australia's tough conditions, backed by 70 years of Rheem water heating know how
- Capacities to suit every family size and hot water requirements
- Mains Pressure water delivery for steady, hot and strong®
- Full technical support through Rheem's National Service Network
- Available to suit Natural Gas or Propane












# RHEEM 4 STAR GAS STORAGE WATER HEATER

## MAINS PRESSURE HOT WATER WHEN YOU NEED IT

Mains pressure gas storage water heaters are your guarantee of consistent hot water. You can be sure of a strong flow of hot water, even to multiple taps at once.

With a range of capacities, there is a model for every budget and family, and Rheem's modern design complements any home.

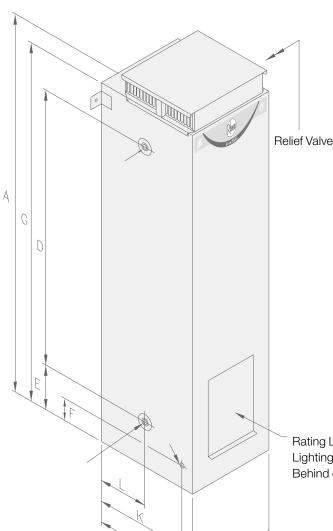

MODEL				
MODEL		RHEEM 4 STAR GAS		
		90L	135L	170L
		347090N0	347135N0/P0	347170N0/P0
Number of People				
Moderate Climate		1-3	2-4	3-5
Cool Climate		1-2	2-3	3-4
Warranty (Cylinder)1	Years	10	10	10
Installation		Outdoor Only		
Gas Type		Natural Gas	Natural Gas /Propane	Natural Gas /Propane
Gas Energy Rating	Stars	4	4	4
Storage Capacity	Litres	90	135	170
Recovery Rate @ 45°C rise	L/hr	100	113	118
Hourly Gas Consumption Natural Gas	MJ/hr	25	27	27
Dimensions				
А	mm	1158	1558	1858
В	mm	422	422	422
С	mm	502	502	502
D	mm	588	988	1213
Е	mm	328	328	403
F	mm	298	298	298
G	mm	1078	1478	1778
K	mm	473	473	473
L	mm	208	208	208
Weight Empty	kg	48	59	69
Relief Valve Setting	kPa	1400	1400	1400
Expansion Control Valve Setting*	kPa	1200	1200	1200
Max. Water Supply Pressu	ıre			
with ECV#	kPa	960	960	960
without ECV	kPa	1120	1120	1120
		D- 2/	D= 2/	D. 2/
Water Connection		Rp ¾	Rp ¾	Rp ¾

Rating Label + **Lighting Instructions** Behind cover

See Rheem's warranty set out in the product's Owner's Manual or view it at www.rheem.com.au/warrantv.





Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia



<sup>&</sup>lt;sup>1</sup> Warranty: 10 years on Cylinder, 1 year Labour on Cylinder, 1 year parts & labour warranty on all other components, for Domestic (non-Commercial) installations. Conditions apply.

<sup>&</sup>lt;sup>2</sup> For details of all Rheem Gas Storage Hot Water models visit www.rheem.com.au.

<sup>&</sup>lt;sup>3</sup> At 45°C temperature rise

<sup>&</sup>lt;sup>e</sup> ECV not supplied with water heater.

Materials and specifications are subject to change without notice.

<sup>&</sup>lt;sup>o</sup> Registered Trademark of Rheem Australia Pty Ltd.